



## Federal Series

# 5050 Glass 15W RTBW

## Stage Lighting

### Datasheet

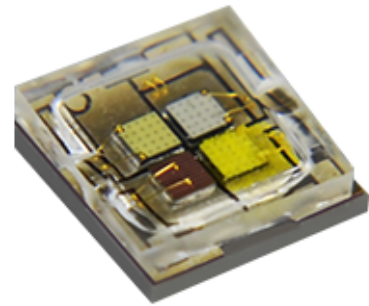

#### Features :

- Available in red, green, blue and white in a single package
- Maximum drive current per LED die : R:1000mA ; T/B/W(CW): 1200mA
- Individually addressable LEDs
- Electrically neutral thermal path
- Thermal Resistance ( $R_{th}$ )=0.7°C/W
- RoHS compliant
- Flat package with cover glass on top.

#### Typical Applications :

- Stage lighting
- Color-changing lighting
- Mood lighting
- Architectural lighting
- Entertainment lighting
- Indoor directional lighting

## Table of Contents

---

General Information.....	3
Absolute Maximum Ratings .....	4
Characteristics .....	4
Luminous Flux Characteristic.....	5
Wavelength Bin Structure .....	5
Color BIN code.....	6
Mechanical Dimensions.....	7
Characteristic curve.....	9
Reflow Profile .....	15
Product Packaging Information.....	16
Revision History .....	17
About Edison Opto .....	17

## General Information

### Introduction

Federal 5050 Series is a smaller and brighter multi-chip LED which provides multi-color packaging flexibility. Federal is a surface mount, compact, high brightness LED that is suitable for various illumination needs such as stage lighting, color-changing lighting, mood lighting, architectural lighting, as well as entertainment lighting and indoor directional lightings. The multi-color LEDs (RGBW) are especially suitable for stage lights, and with its smallest dimensions in the world, enables a higher flexibility for optical design. All the Edison products are carefully tested in order to achieve reliability and optimal performance, for giving you an extraordinary LED experience.

### Ordering Code Format

2  
X1
F  
X2
M 0  
X3
1 5  
X4
M 2  
X5
x x  
X6
F 0 3  
X7
x x x  
X8

X1		X2		X3		X4		X5	
Type		Component		Series		Wattage		Color	
2	Emitter	F	Federal	M0	5050	15	15W	M2	RTBW

X6		X7		X8	
Internal code		PCB Board		Serial Number	
-	-	F03	5050	-	-

## Absolute Maximum Ratings

Parameter	Symbol	Value	Units
DC Forward Current <sup>[1]</sup>	$I_F$	R:1000 T/B/W(CW): 1200	mA
Reverse Voltage <sup>[2]</sup>	$V_R$	Note 2	V
LED Junction Temperature <sup>[3]</sup>	$T_J$	125	°C
Operating Temperature	-	-40 ~ +85	°C
Storage Temperature	-	-40 ~ +125	°C
Soldering Temperature	-	260	°C

Notes:

- LEDs are not designed to drive in reverse bias.
- Proper current derating must be observed to maintain junction temperature below the maximum.

## Characteristics

Parameter	Symbol	Value	Units
Viewing Angle	$2\theta_{1/2}$	115	Degree
Forward voltage@350mA	$V_F$	R:1.5~2.5 T: 2.7~3.7 B/W(CW): 2.5~3.5	V
Thermal resistance	-	0.7	°C/W
CCT/Wavelength	-	R: 620 - 630 T: 520 - 530 B: 450 - 460 W(CW): 5,000-7,000	K/nm
CRI (Ra)	-	CRI70	-
JEDEC Moisture Sensitivity	-	Level 1  <b>Floor Life</b> Conditions: ≤30°C / 85% RH  <b>Soak Requirements(Standard)</b> Time (hours): 168+5/-0 Conditions: 85°C / 85% RH	-

Notes:

- Edison maintains a tolerance of ±1nm for dominant wavelength.
- Viewing angle is measured with accuracy of ±10%.
- Color rendering index CRI Tolerance : ±2

## Luminous Flux Characteristic

Luminous Flux Characteristics,  $I_f=350\text{mA}$  and  $T_j=25^\circ\text{C}$

Emitter Type	Color	Ra	WD	Luminous Flux @350mA (lm)	Luminous Flux @700mA (lm)	Luminous Flux @1,000mA (lm)	Luminous Flux @1,200mA (lm)	Order Code
RTBW	Cool White	70	-	95~125	190~230	250~295	295~340	2FM015M206F03S02
	True Green	-	520-530	105~125	165~195	205~230	230~260	
	Blue	-	450-460	15~23	27~37	37~47	44~55	
	Red	-	620-630	35~50	70~95	100~125	-	

Note:

The luminous flux performance is guaranteed within published operating conditions. Edison Opto maintains a tolerance of  $\pm 10\%$  on flux measurements.


## Wavelength Bin Structure

Color	Group	Min. Wd (nm)	Max. Wd (nm)
Red	X	620	630
True Green	W	520	525
	X	525	530
Blue	U	450	455
	V	455	460

Note:

Dominant wavelength measurement allowance:  $\pm 1\text{nm}$ .

## Color BIN code

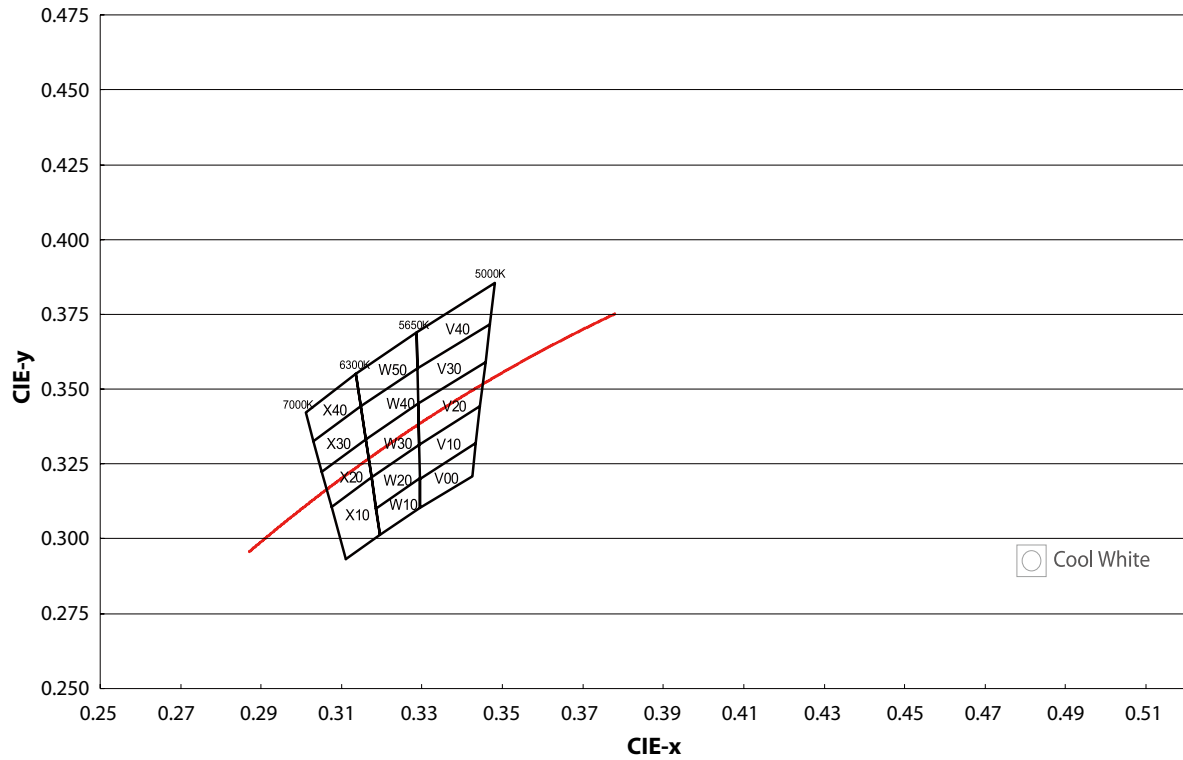

X10		X20		X30		X40	
X	Y	X	Y	X	Y	X	Y
0.3076	0.3108	0.3076	0.3108	0.3052	0.3224	0.3031	0.3327
0.3174	0.3204	0.3052	0.3224	0.3031	0.3327	0.3011	0.3422
0.3196	0.3013	0.3160	0.3332	0.3148	0.3444	0.3136	0.3550
0.3112	0.2932	0.3175	0.3204	0.3160	0.3332	0.3148	0.3444


W10		W20		W30		W40		W50	
X	Y	X	Y	X	Y	X	Y	X	Y
0.3294	0.3202	0.3292	0.3313	0.3290	0.3451	0.3290	0.3451	0.3148	0.3444
0.3295	0.3105	0.3294	0.3202	0.3292	0.3313	0.3160	0.3332	0.3136	0.3550
0.3196	0.3013	0.3186	0.3102	0.3175	0.3204	0.3148	0.3444	0.3286	0.3690
0.3186	0.3102	0.3175	0.3204	0.3160	0.3332	0.3288	0.3569	0.3288	0.3569

V00		V10		V20		V30		V40	
X	Y	X	Y	X	Y	X	Y	X	Y
0.3434	0.3320	0.3292	0.3313	0.3292	0.3313	0.3290	0.3451	0.3288	0.3569
0.3425	0.3208	0.3444	0.3442	0.3290	0.3451	0.3288	0.3569	0.3286	0.3690
0.3295	0.3105	0.3434	0.3320	0.3458	0.3592	0.3469	0.3717	0.3481	0.3856
0.3294	0.3200	0.3294	0.3200	0.3444	0.3442	0.3458	0.3592	0.3469	0.3717


Note:  
CIE\_x/y tolerance:  $\pm 0.005$ .

## Mechanical Dimensions


### Emitter Type Dimension

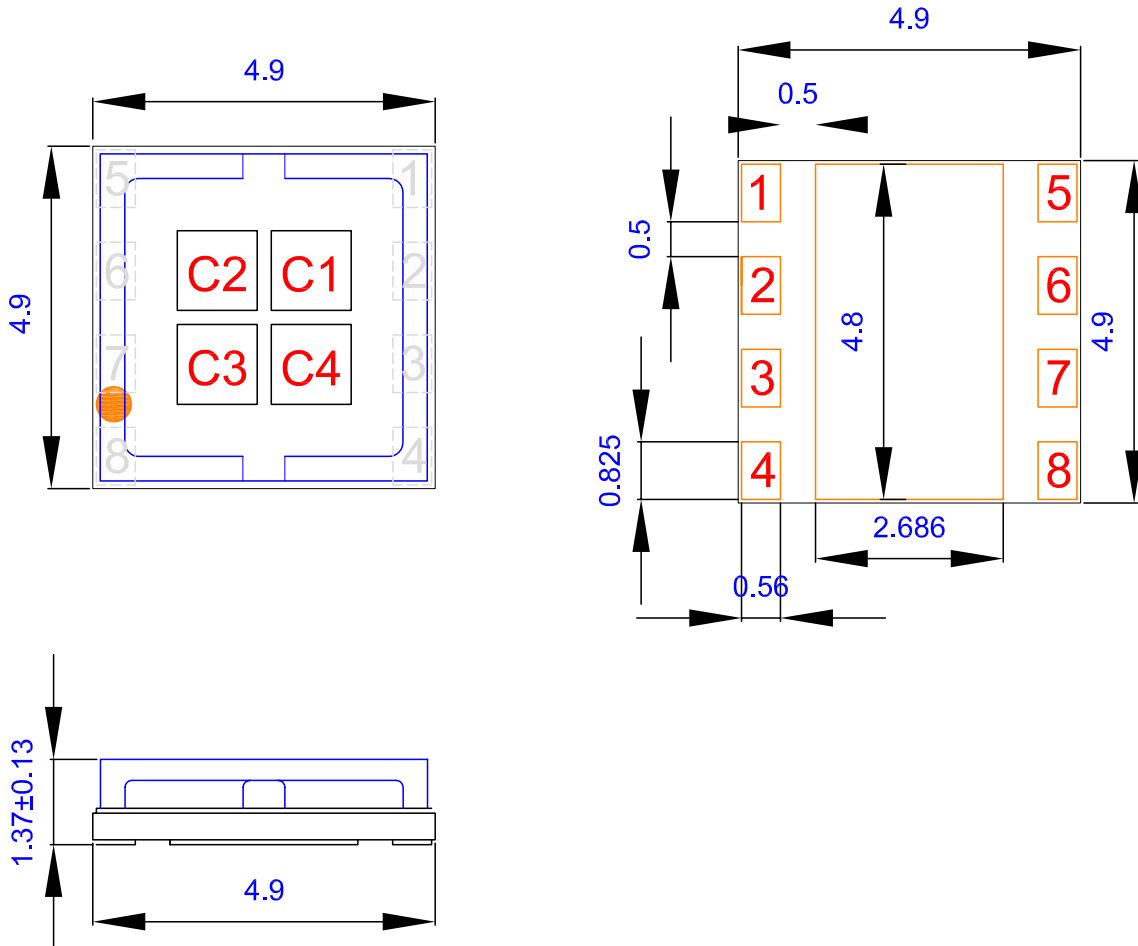

## Circuit

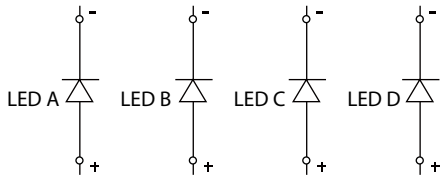

## PCB Layout

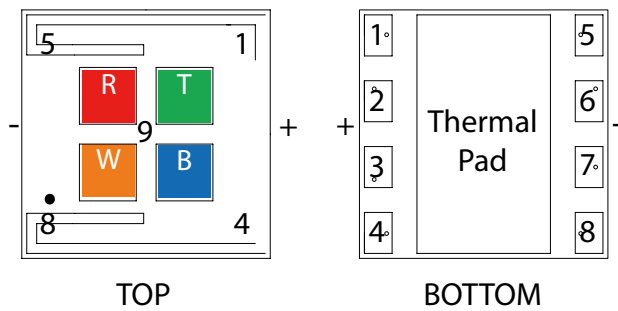

Pad Configuration

Color	FUNCTION	
	Anode	Cathode
Green	1	5
Red	2	6
CW	3	7
Blue	4	8



Note:

The thermal pad is electrically isolated from anode and cathode.




## Characteristic curve


### Color Spectrum

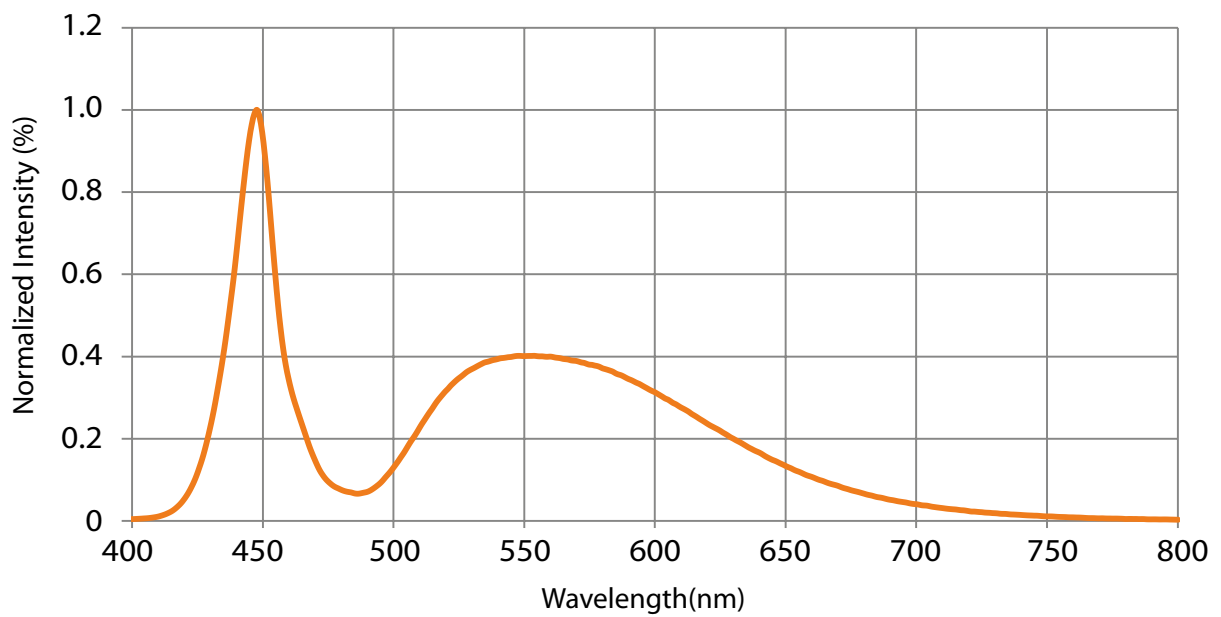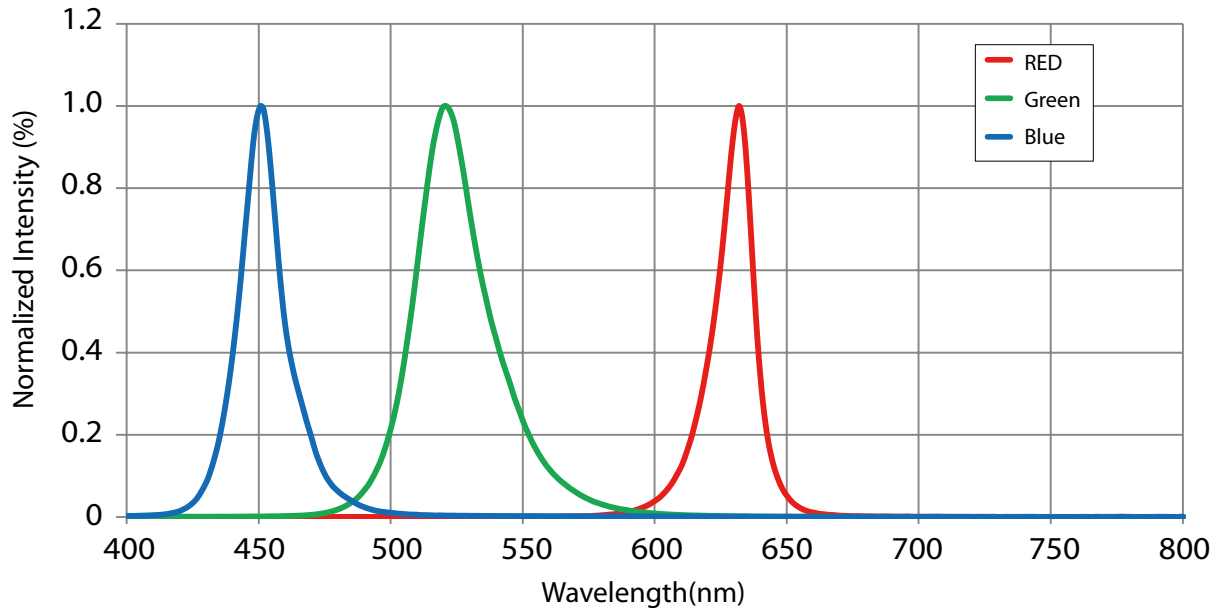


**Beam Pattern**

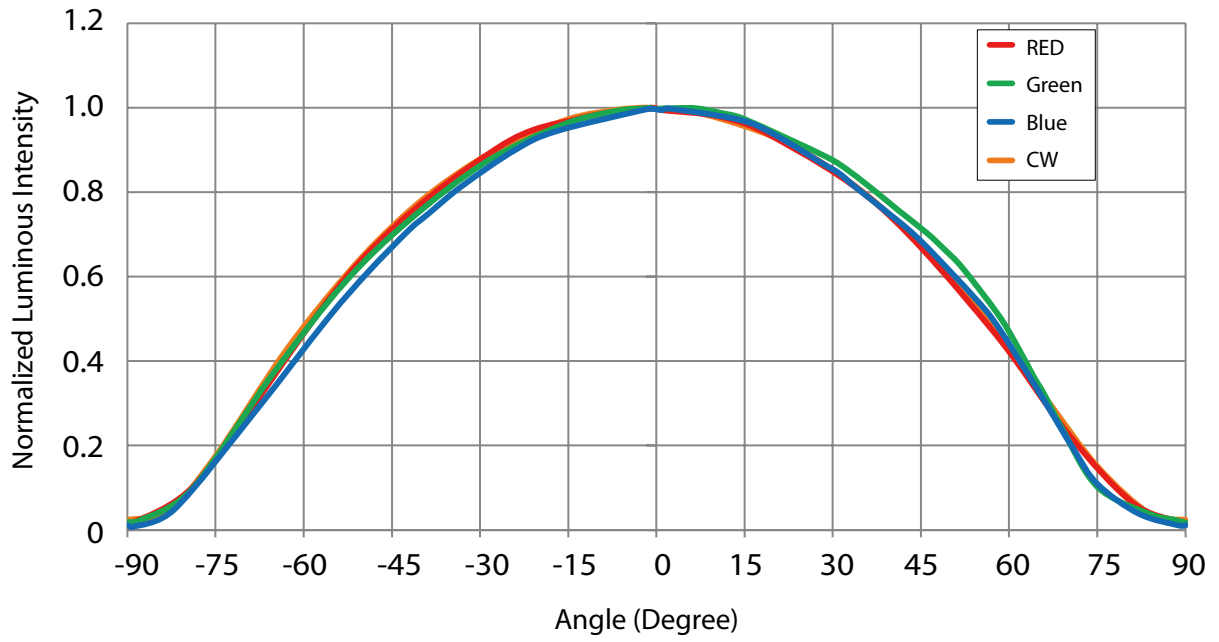


**Forward Current vs. Forward Voltage**  $I_F = f(V_F); T_{\text{ambient}} = 25^\circ\text{C}$

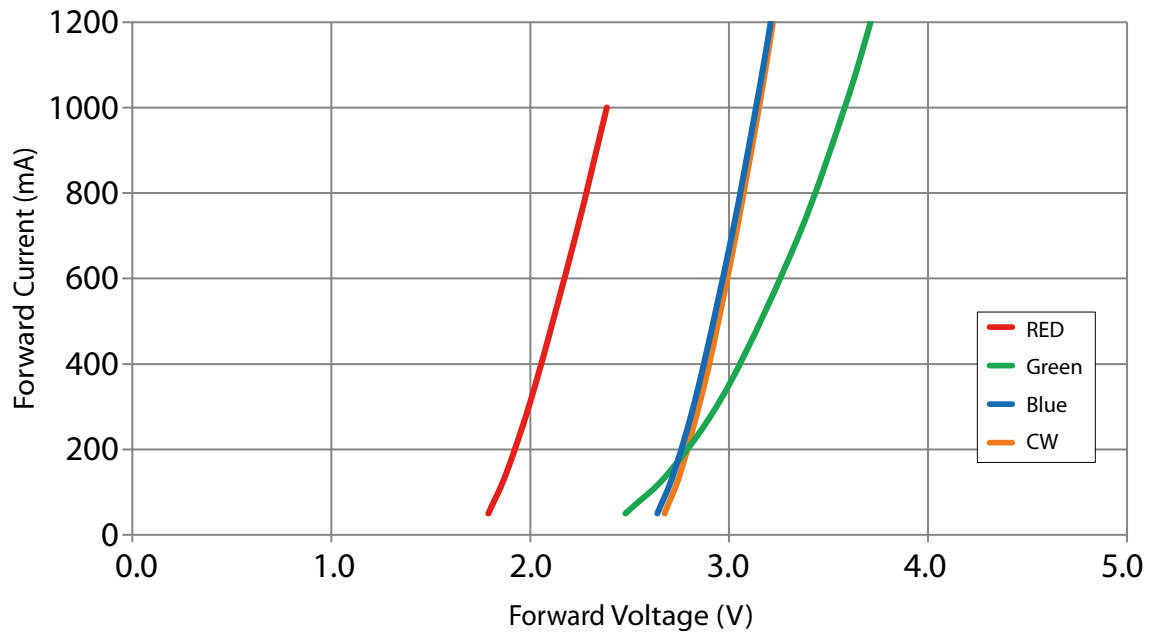


**Relative Luminous Intensity vs. Forward Current**  $I_V/I_V(350\text{mA}) = f(I_F); T_{\text{ambient}} = 25^\circ\text{C}$

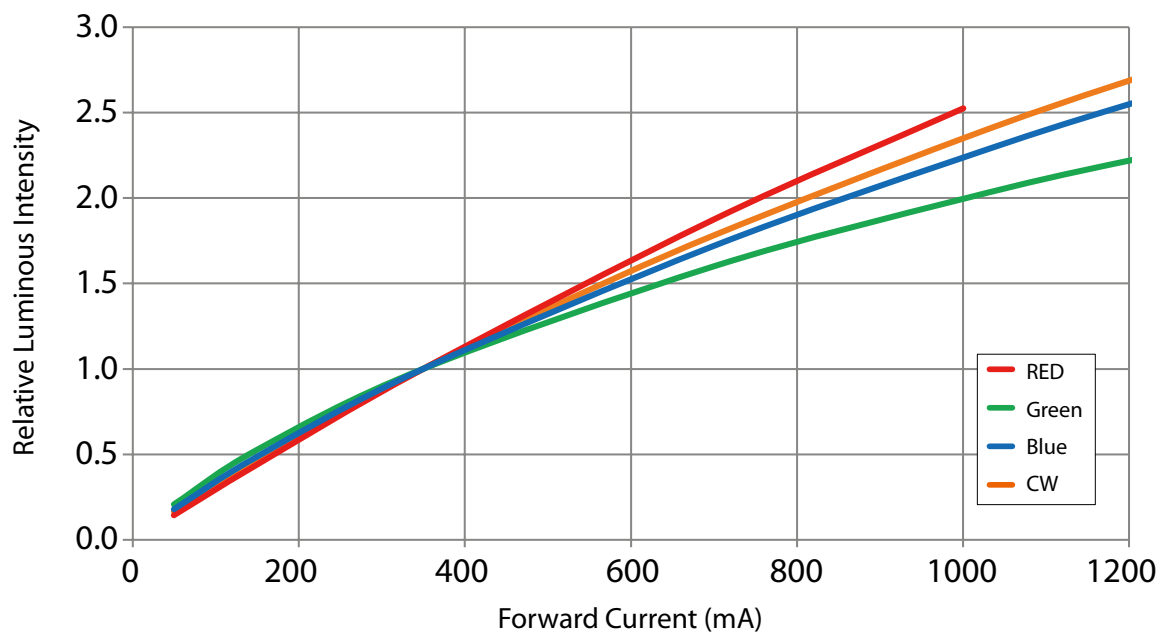


**Wavelength vs. Forward Current**  $T_{\text{ambient}} = 25\text{ }^{\circ}\text{C}$

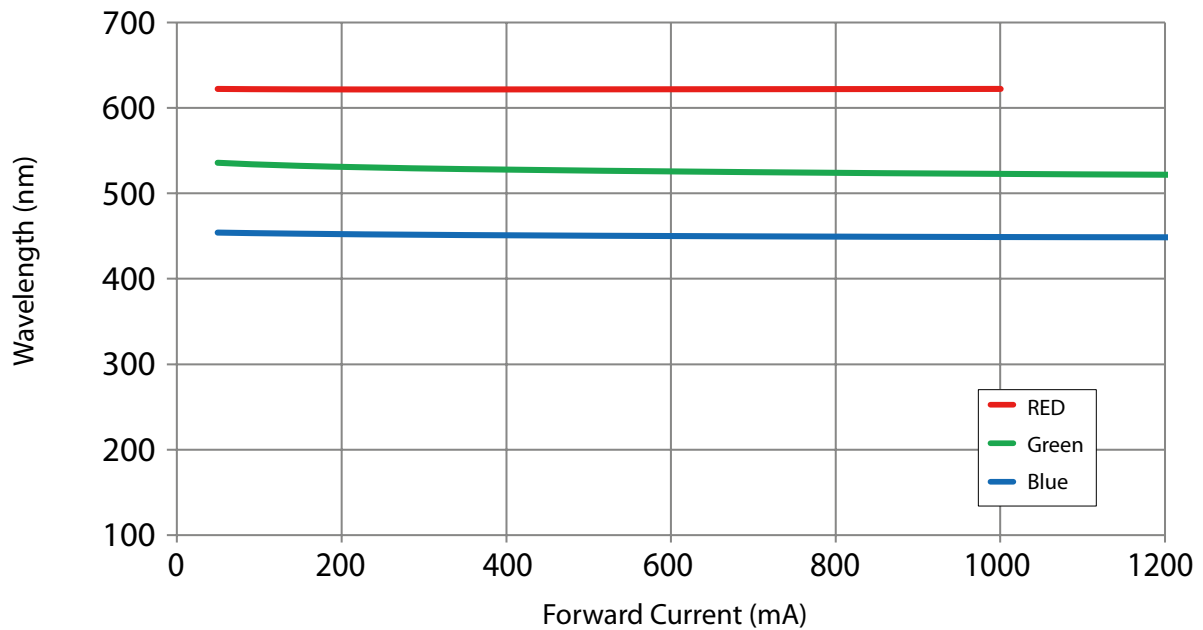


**$\Delta x, \Delta y$  vs. Forward Current**  $\Delta C_x, \Delta C_y = f(I_F); T_{\text{ambient}} = 25\text{ }^{\circ}\text{C}$

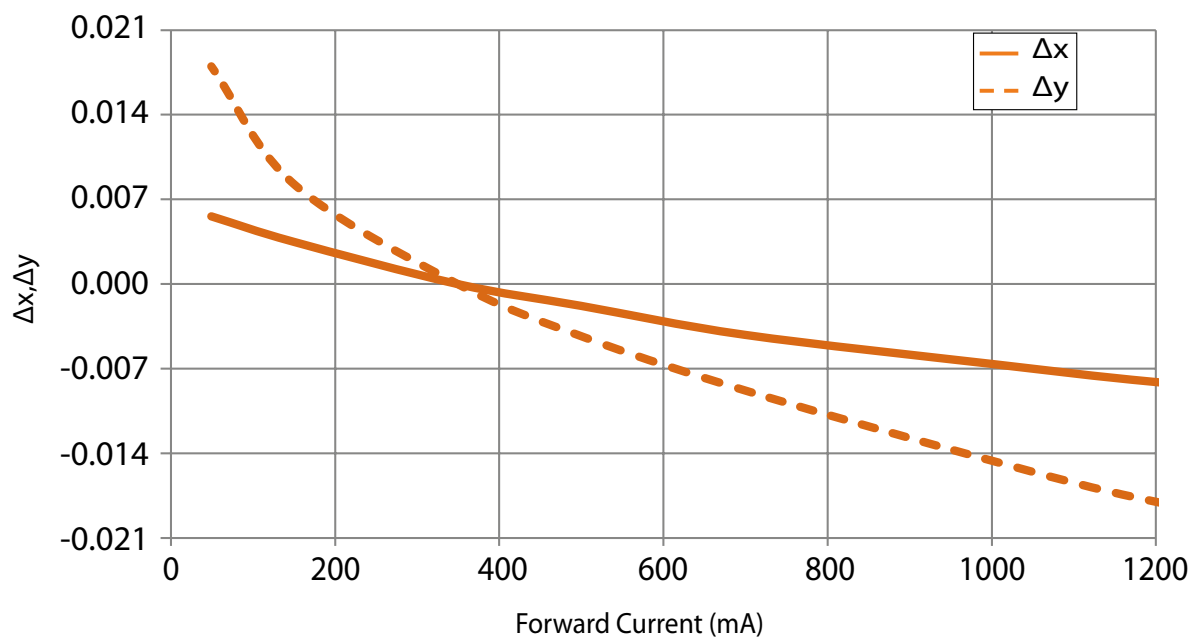


**Relative Luminous Flux vs. Junction Temperature**  $I_V/I_V(25^\circ\text{C}) = f(T_j)$ ;  $I_F = 350\text{mA}$

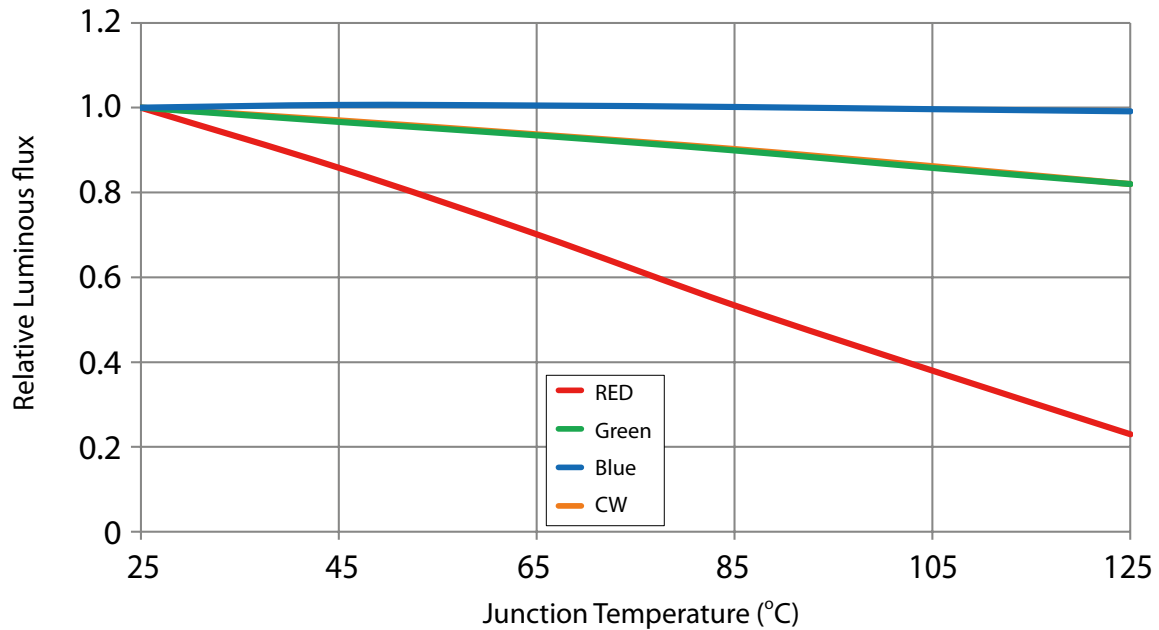


**$\Delta V_F$  vs. Junction Temperature**  $\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j)$ ;  $I_F = 350\text{mA}$

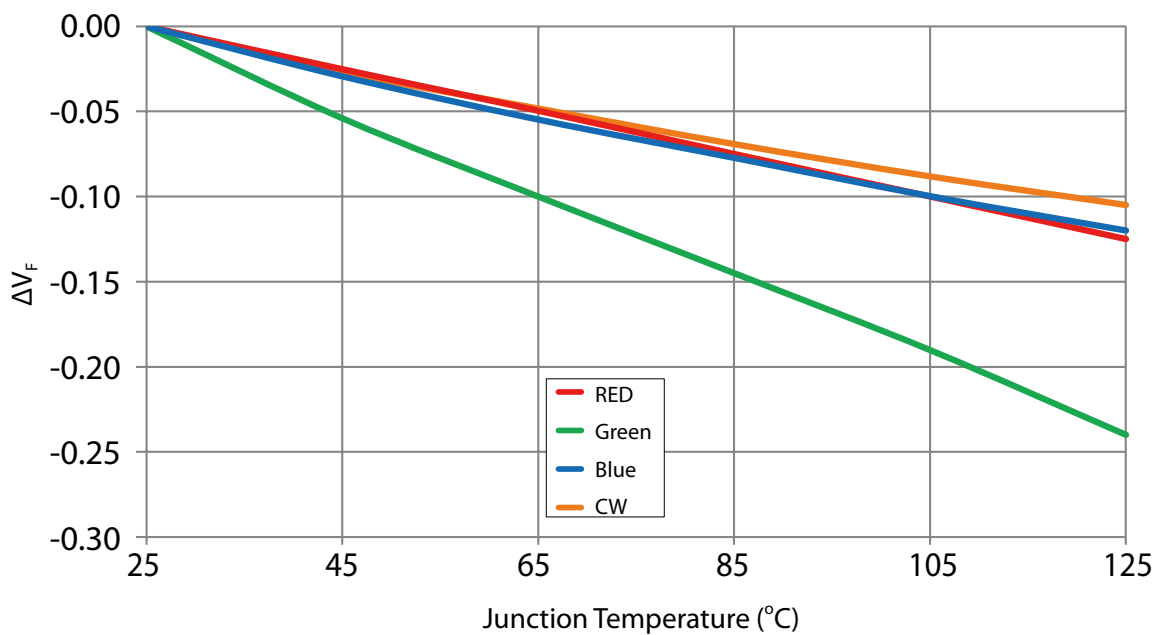

**Wavelength vs. Junction Temperature** IF = 350mA

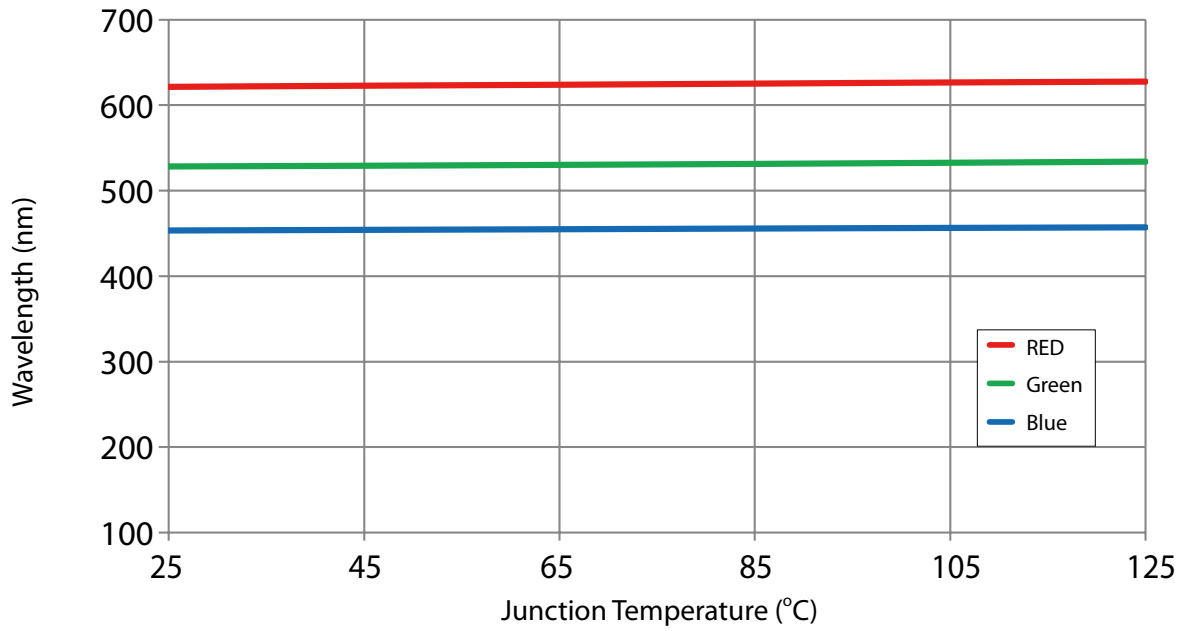


**$\Delta x, \Delta y$  vs. Junction Temperature**  $\Delta C_x, \Delta C_y = f(IF)$ ; IF = 350mA

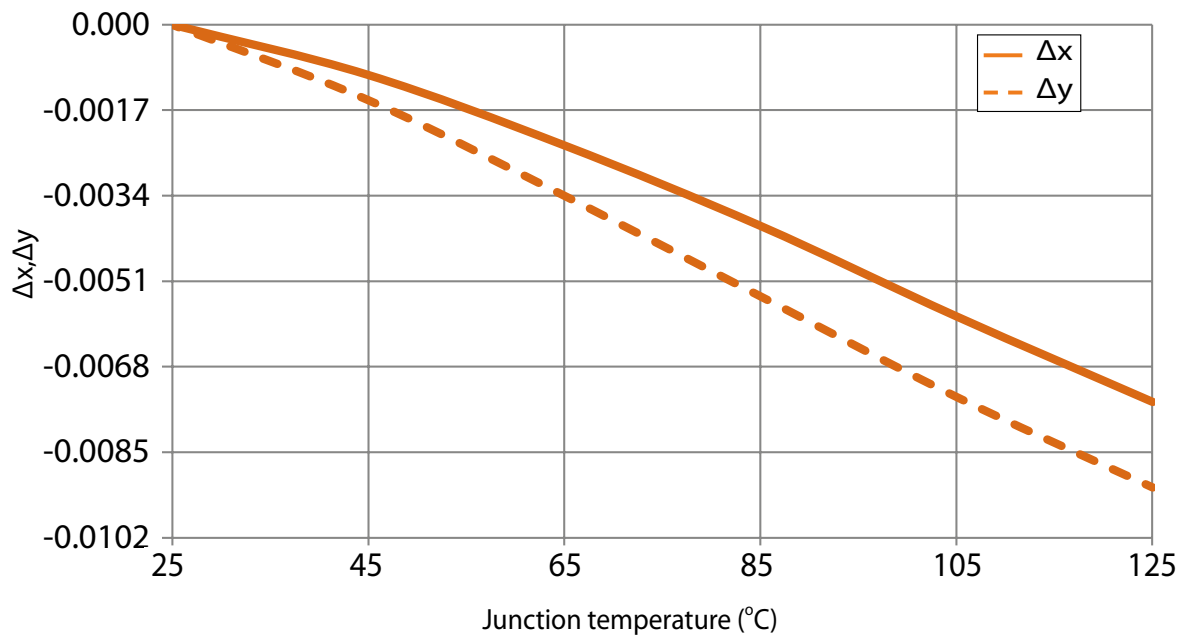

## Reflow Profile

The following reflow profile is from IPC/JEDEC J-STD-020D which provided here for reference.

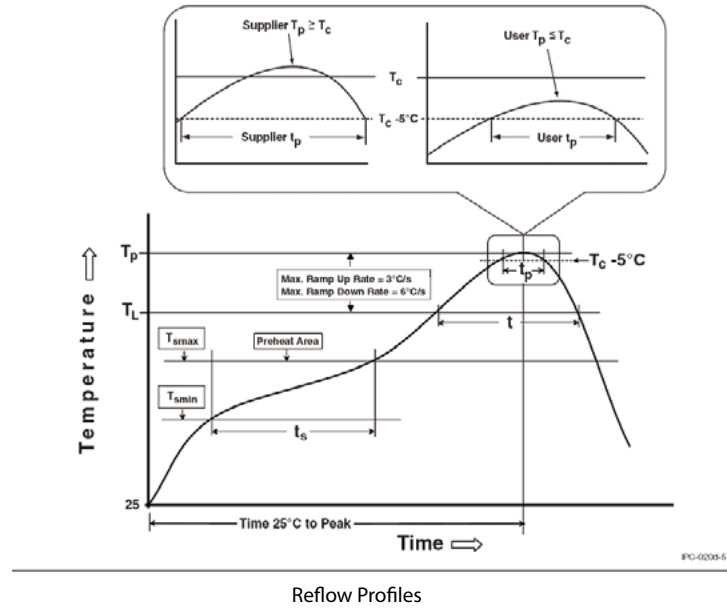




### Classification Reflow Profiles

Profile Feature	Pb-Free Assembly
Preheat & Soak Temperature min ( $T_{smin}$ ) Temperature max ( $T_{smax}$ ) Time ( $T_{smin}$ to $T_{smax}$ ) (ts)	150 °C 200 °C 60-120 seconds
Average ramp-up rate ( $T_{smax}$ to $T_p$ )	3 °C/second max.
Liquidous temperature ( $T_L$ ) Time at liquidous ( $t_L$ )	217 °C 60-150 seconds
Peak package body temperature ( $T_p$ )*	255 °C ~260 °C *
Classification temperature ( $T_c$ )	260 °C
Time ( $t_p$ )** within 5 °C of the specified classification temperature ( $T_c$ )	30** seconds
Average ramp-down rate ( $T_p$ to $T_{smax}$ )	6°C/second max.
Time 25°C to peak temperature	8 minutes max.

Notes:

- \* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.
- \*\* Tolerance for time at peak profile temperature ( $t_p$ ) is defined as a supplier minimum and a user maximum.

## Product Packaging Information

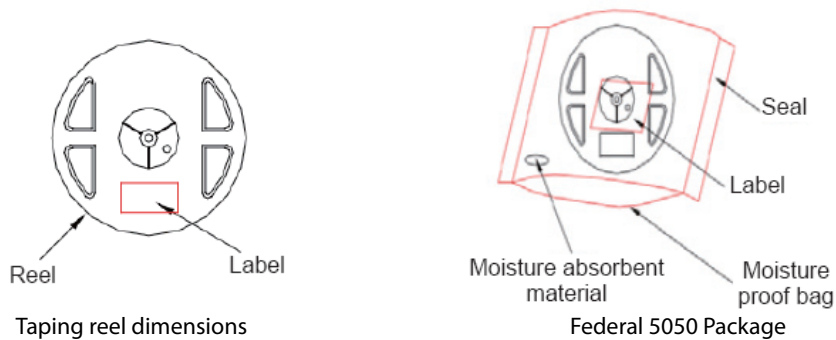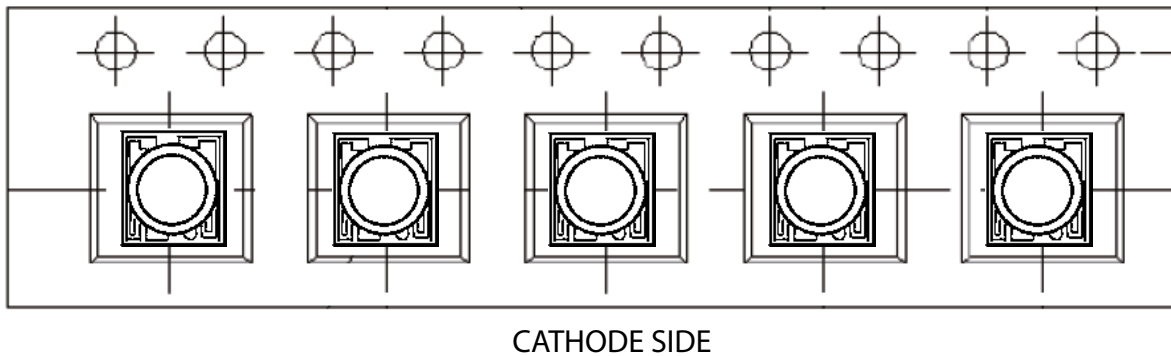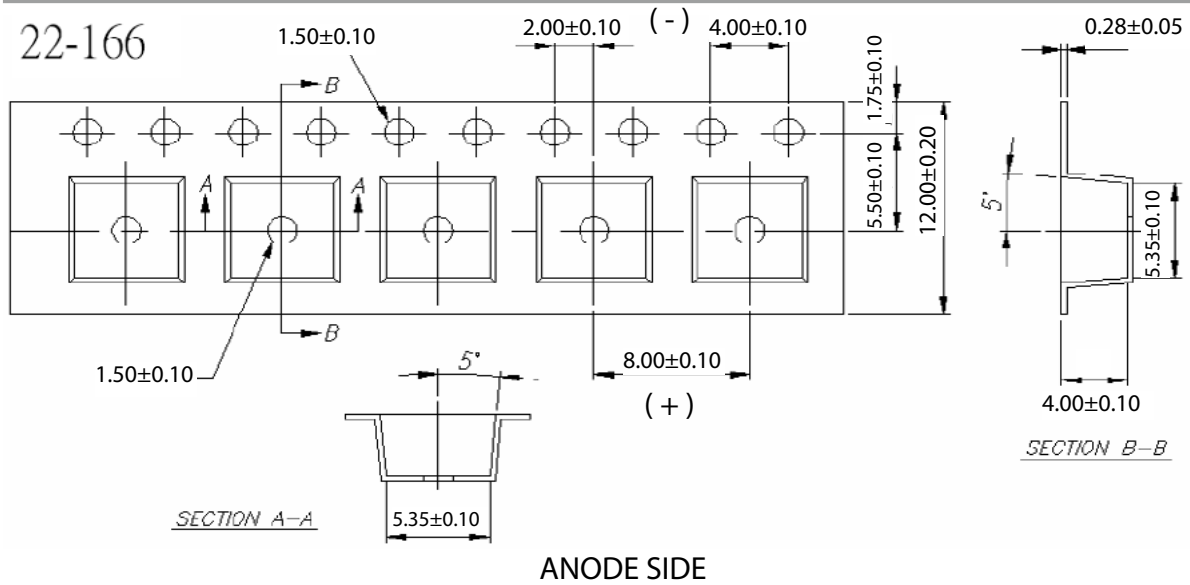

Item	Quantity	Total	Dimensions(mm)
Reel	500pcs	500pcs	R-178
Box	4 Reels	2,000pcs	240*235*67
Carton	5 boxes	10,000pcs	353*354*256

Starting with 50pcs empty, and 50pcs empty at the last



## Revision History

Versions	Description	Release Date
0.1	Preliminary	2019/10/23

## About Edison Opto

Edison Opto is a leading manufacturer of high power LED and a solution provider experienced in LDMS. LDMS is an integrated program derived from the four essential technologies in LED lighting applications- Thermal Management, Electrical Scheme, Mechanical Refinement, Optical Optimization, to provide customer with various LED components and modules. More Information about the company and our products can be found at [www.edison-opto.com](http://www.edison-opto.com)

Copyright©2019 Edison Opto. All rights reserved. No part of publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photo copy, recording or any other information storage and retrieval system, without prior permission in writing from the publisher. The information in this publication are subject to change without notice.

[www.edison-opto.com](http://www.edison-opto.com)

For general assistance please contact:  
[service@edison-opto.com.tw](mailto:service@edison-opto.com.tw)

For technical assistance please contact:  
[LED.Detective@edison-opto.com.tw](mailto:LED.Detective@edison-opto.com.tw)