

PLCC FPC 5630 Lightbar Series Datasheet



Product description :

- 12/24 V constant voltage strip (SELV)
- Ideal for application on aluminum extrusions but also for various decorative lighting applications such as cove lighting, facade accent lighting etc.

Features and benefits :

- Small color tolerance (Macadam 3-5), Ra > 80
- Color temperature 2700, 3000, 4000 and 5700 K
- Self-adhesive 3M tape at the backside for simple mounting on different surfaces
- Life-time 30,000-50,000 hours
- 3-5-year guarantee

Typical Applications :

- Stairway Accent Lighting
- Stairway Accent Lighting
- Architectural decorative Lighting
- Arch edge Lighting

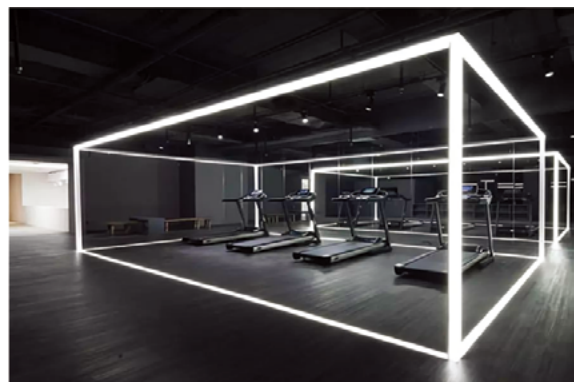


Table of Contents

General Information.....	3
Technical data.....	3
Product Dimensions.....	4
Electric-Optical Characteristics	5
Standards	6
Thermal details.....	6
Life time	7
Product Packaging Information.....	8
Precaution for Use.....	9
Environmental Compliance	9
Application Notes.....	9
Revision History	10
About Edison Opto	10

General Information

Ordering Code Format

6
X1
L B R 1
X2
X X
X3
N
X4
X
X5
0 0 0 0 0 0 X
X6


X1 Item	X2 Series		X3 Emitting Color		X4 Angle	X5 Driver		X6 Serial No.			
6	Module	LBR1	FPC	CW	Cool White	N	120	I	CV 12V	xxxxxxx	-
				NW	Neutral White			J	CV 24V		
				WW	Warm White						
				M6	CW+WW						

Technical data


Parameter	Value	Units
Beam characteristic	120	°C
Ambient temperature range	-25~ +45	°C
Tp rated	65	°C
Tc	75	°C
Type of protection	IP20	
Color Temperature	2700	K
	3000	K
	4000	K
	5700	K
Number of connection	5	M
Risk group(EN62778)	1	
Classification acc. to	IEC62031	
	IEC62778	
	IEC62717	
	IEC61000-4-2	

Product Dimensions


6LBR1xWNI000000x Series Dimensions (CV 12V)

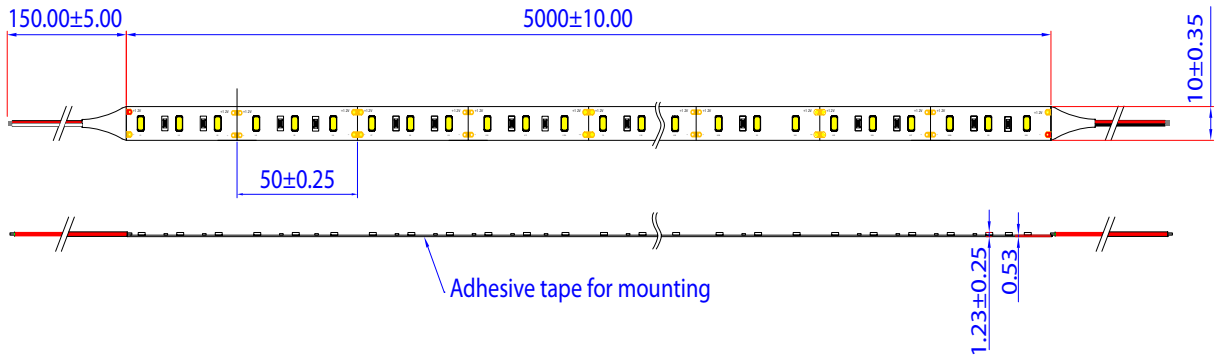

6LBR1xWNJ000000x Series Dimensions (CV 24V)

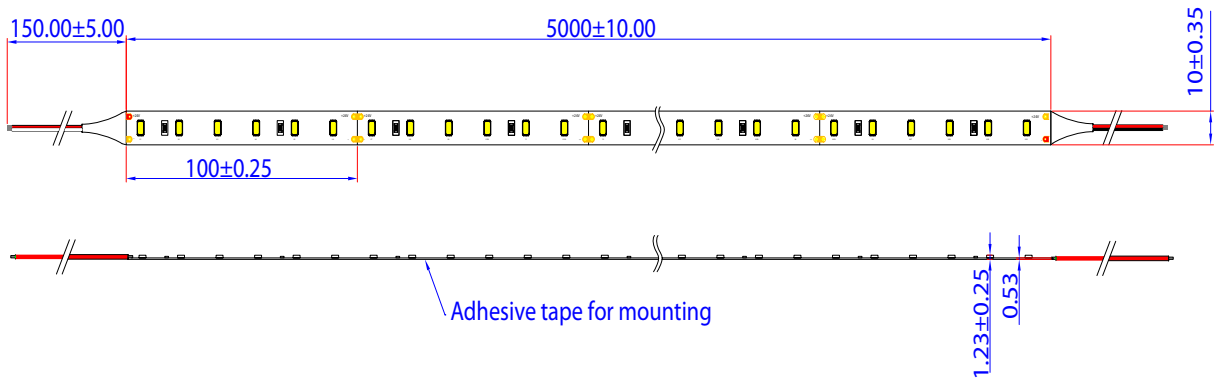

6LBR1M6NJ0000004 Series Dimensions (CV 24V)

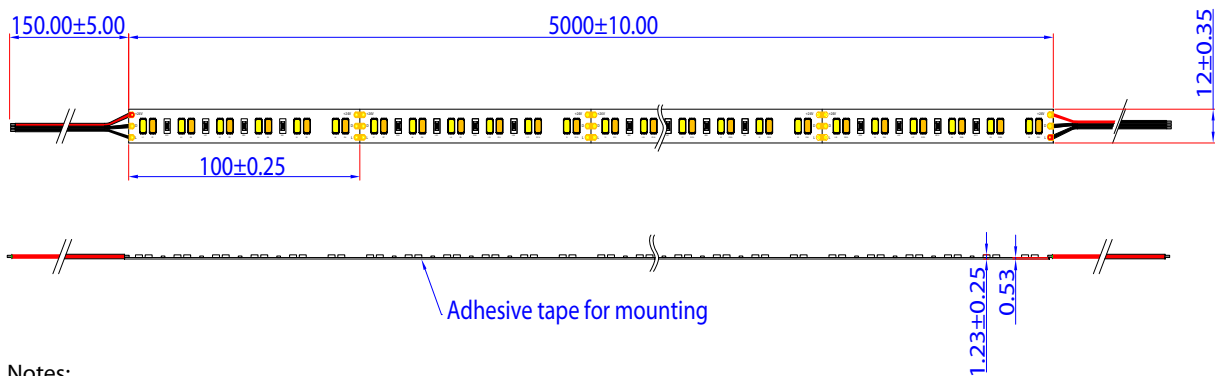

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.20 mm

Electric-Optical Characteristics

6LBR1xWNI000000x Series (60LEDs/M)

Order code	CCT (K)	Voltage (CV)	Luminous flux TP25°C	Luminous flux TP65°C	Efficacy TP25°C	Efficacy TP65°C	Power (W/M)	Ra
6LBR1CWNI0000004	5700	12	1700 lm/M	1530 lm/M	118 lm/W	106 lm/W	14.4	>80
6LBR1NWNJ0000004	4000	12	1700 lm/M	1530 lm/M	118 lm/W	106 lm/W	14.4	>80
6LBR1WWNI0000005	3000	12	1600 lm/M	1440 lm/M	111 lm/W	100 lm/W	14.4	>80
	2700	12	1520 lm/M	1368 lm/M	106 lm/W	95 lm/W	14.4	>80

6LBR1xWNJ000000x Series (60LEDs/M)

Order code	CCT (K)	Voltage (CV)	Luminous flux TP25°C	Luminous flux TP65°C	Efficacy TP25°C	Efficacy TP65°C	Power (W/M)	Ra
6LBR1CWNJ0000006	5700	24	1700 lm/M	1530 lm/M	118 lm/W	106 lm/W	14.4	>80
6LBR1NWNJ0000007	4000	24	1700 lm/M	1530 lm/M	118 lm/W	106 lm/W	14.4	>80
6LBR1WWNJ0000008	3000	24	1600 lm/M	1440 lm/M	111 lm/W	100 lm/W	14.4	>80
	2700	24	1520 lm/M	1368 lm/M	106 lm/W	95 lm/W	14.4	>80

6LBR1M6NJ0000004 Series (120CW LEDs/M)

Order code	CCT (K)	Voltage (CV)	Luminous flux TP25°C	Luminous flux TP65°C	Efficacy TP25°C	Efficacy TP65°C	Power (W/M)	Ra
6LBR1M6NJ0000004	5700	24	1700 lm/M	1530 lm/M	118 lm/W	106 lm/W	14.4	>80
	3000	24	1600 lm/M	1440 lm/M	111 lm/W	100 lm/W	14.4	>80
	2700	24	1520 lm/M	1368 lm/M	106 lm/W	95 lm/W	14.4	>80

Notes:

- 1.The Maximum and minimum lumen flux are based on $\pm 10\%$ of the typical rate.
- 2.The Maximum and minimum Power are based on $\pm 10\%$ of the typical rate.

Standards

Energy classification

Type	CCT	Energy Classification
5630-12v-60LED/M Series	2700/3000K	A+
	4000/5700K	A+
5630-24v-60LED/M Series	2700/3000K	A+
	4000/5700K	A+
5630-24v-120CW Series	2700/3000K	A+
	5700K	A+

Thermal details

Energy classification

Storage temperature:-35 ... +70 °C

Operation only in non condensing environment.

Humidity during processing of the module should be between 0 to 70 %

Life time

Life-time, lumen maintenance and failure rate

1. The light output of an LED Module decreases over the life-time, this is characterized with the L value.
2. L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the life-time of an LED module.
3. As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value. In addition the percentage of failed modules (fatal failure) is characterized by the C value.
4. The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED Modules may fail or below 70% of the initial luminous flux.

Lumen maintenance for 5630-12v-60LED/M Series

Supply Voltage	Tp temperature	L90/F10	L90/F50	L80/F10	L80/F50	L70/F10	L70/F50
12V	40	>28,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
12V	45	>27,000 h	>29,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
12V	55	>25,000 h	>27,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
12V	65	>23,000 h	>25,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
12V	75	>21,000 h	>23,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h

Lumen maintenance for 5630-24v-60LED/M Series


Supply Voltage	Tp temperature	L90/F10	L90/F50	L80/F10	L80/F50	L70/F10	L70/F50
24V	40	>28,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
24V	45	>27,000 h	>29,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
24V	55	>25,000 h	>27,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
24V	65	>23,000 h	>25,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
24V	75	>21,000 h	>23,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h

Lumen maintenance for 5630-24v-120CW Series

Supply Voltage	Tp temperature	L90/F10	L90/F50	L80/F10	L80/F50	L70/F10	L70/F50
24V	40	>28,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
24V	45	>27,000 h	>29,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
24V	55	>25,000 h	>24,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
24V	65	>23,000 h	>25,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h
24V	75	>21,000 h	>23,000 h	>30,000 h	>30,000 h	>30,000 h	>30,000 h

Product Packaging Information

Type	Anti-static bag size(mm)	Anti-static bags/ inner box(pcs)	Inner box/carton(pcs)	Outside Carton size(mm)	GW±5% (kg)
5630-12V-60LED/M Series	260x230x10	4	10	488x261x364	6.5
5630-24V-60LED/M Series	260x230x10	4	10	488x261x364	6.5
5630-24V-120LED/M Series	260x230x10	4	10	488x261x364	6.7

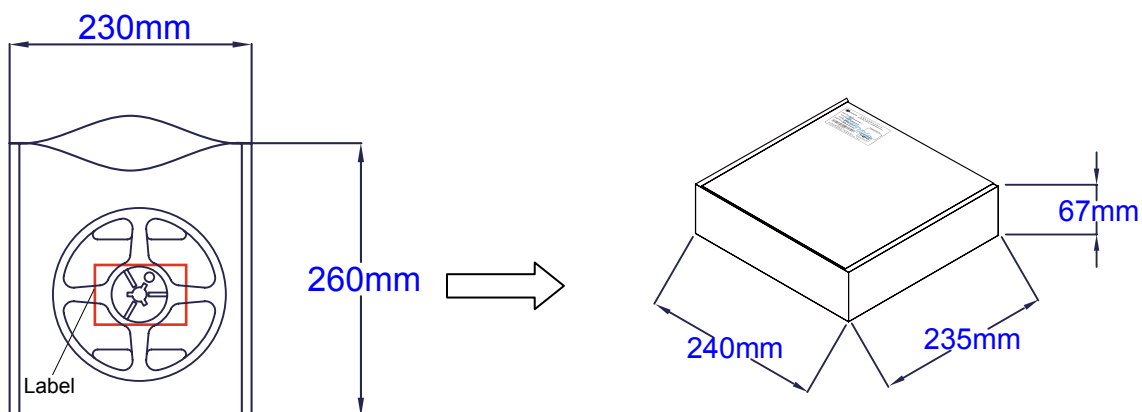


EX:

 艾笛森光電股份有限公司 EDISON OPTO CORPORATION	
Part No. : <u>6LBR1CWNJ0000005</u>	Inspected by:
Color : <u>Cool White(34W3FVB2)</u>	<input type="text"/>
Quantity : <u>1 Reel(5M)</u>	
Lot No. : <u>D1201-12110022</u>	
 A410000005 Tel +86-2-82276996 Fax +86-2-8227-6997 4F No.800 Chung-Cheng .. Chung-Ho City Taipei. Taiwan	 ROHS Directive Compliance

Label information

Part NO. : Order code
Color : Color(Emitter BIN color)
Quantity : The number of packing
Lot NO. : Date code

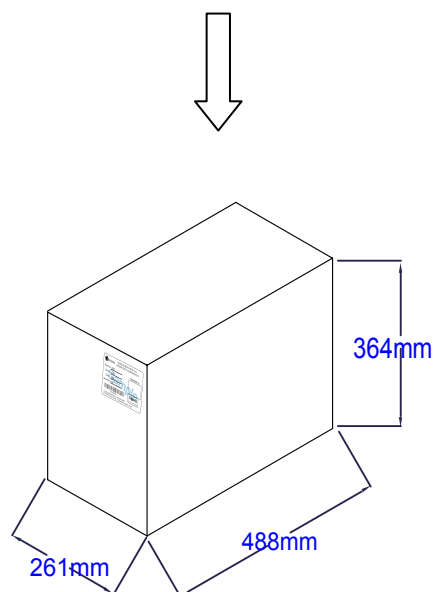

Precaution for Use

1. DO NOT use the products with materials has Sulfur.
2. DO NOT assemble in humid environment or the conditions of containing oxidizing gas such as C1, H2S, NH3, SO2, NOX, etc.
3. DO NOT add or change wires while the circuit of Module is active. Long time exposure to sunlight or UV should be avoided.
4. DO NOT press the product; even a slight pressure may damage the product. The environments such as high temperatures, high humidity or direct expose to sunlight should be avoided since the product is sensitive to these conditions.
5. Installation of LED modules (with power supplies) needs to be made with regard to all applicable and safety standards. Only qualified personnel should be allowed to perform installations.
6. Assembly must not damage or destroy conducting paths on the circuit board.
7. Please ensure that the power supply is of adequate power to operate the total load.
8. The maximum run length from any power feed should be limited to 5000 mm.

Environmental Compliance

PLCC lightbar FPC series are compliant to the Restriction of Hazardous Substances Directive or RoHS. The restricted materials including lead, mercury cadmium hexavalent chromium, polybrominated biphenyls (PBB) and polybrominated diphenyl ether (PBDE) are not used in PLCC lightbar FPC series to provide an environmentally friendly product to the customers.

Application Notes

PLCC Lightbar series are available in red, yellow, green, blue, white, neutral white and warm white for application such as under-cabinet lighting, cove lighting and wall washing. Moreover, additional fine-tuned high color rendering index (CRI) version of white, neutral white and warm white all make PLCC Lightbar the ideal lighting choice for vividly building or decoration products, presenting the products outline.

Revision History

Versions	Description	Release Date
1	Establish order code information	2013/06/19
2	1. Update the Emitting Color of order code format and CRI 2. Add the label information	2013/07/23
3	Add Precaution for Use Revise Typ. Flux Value	2017/05/08
4	Upgrade version	2019/08/30

About Edison Opto

Edison Opto is a leading manufacturer of high power LED and a solution provider experienced in LDMS. LDMS is an integrated program derived from the four essential technologies in LED lighting applications- Thermal Management, Electrical Scheme, Mechanical Refinement, Optical Optimization, to provide customer with various LED components and modules. More Information about the company and our products can be found at www.edison-opto.com

Copyright©2019 Edison Opto. All rights reserved. No part of publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photo copy, recording or any other information storage and retrieval system, without prior permission in writing from the publisher. The information in this publication are subject to change without notice.

www.edison-opto.com

For general assistance please contact:
service@edison-opto.com.tw

For technical assistance please contact:
LED.Detective@edison-opto.com.tw